




# HIGH TEMPERATURE ROTARY BUTTON

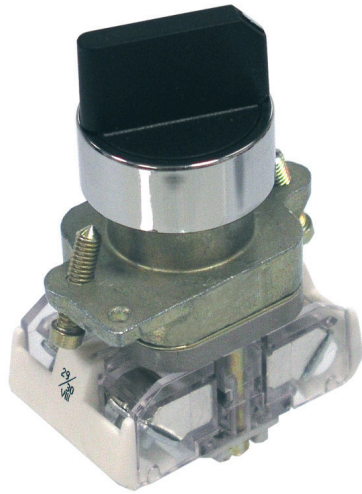

High temperature rotary button for engine compartment

- Start and Stop (depends on electrical configuration)
- High temperature resistance (120 °C)
- Vibration shock resistance
- Salt, hydrocarbons, gas and cleaning agent resistance (Pa6 head)

## Mechanical/Environmental characteristics:

- Operating temperature: - 40 °C to +120 °C
- Mechanical service life: 300 000 operations
- Protection: IP 65, IP 66, IP 69 K (depends on configuration)

## Standards:

- Conception EN 60947-5-1
- Environment EN 60068, EN 60529
- Shock/vibrations EN 61373

## Electrical characteristics:

- I<sub>th</sub>: 20 A
- U<sub>i</sub>: 630 V
- U<sub>im</sub>: 6 kV

## Options:

- Mounted on box or plate
- Encapsulated contact block
- Wiring output
- Connector (plug and play)

