



Footswitch control



This new footswitch control, for trucks, answers the most severe safety requirement with a high performance level.

Excellent mechanical resistance: shocks, abrasion, chemical agents,...

Simplicity of installation:
proposed by series with 4m cable and a joint allowing a fixation without filling of the platform.

Foot controled safety switch for tailboard lifting operations


- Reliable, Heavy-duty and watertight
- Low mounting depth

Standards:

- Application EN 50155
- Conception EN 60947-5-1
- Shocks, vibrations EN 50121-2-3
- Environment EN 60068, EN 60529

Mechanical characteristics:

- Operating temperature: -30°C/+50°C
- Plastic material
- Shocks resistance: IK10
- Protection : IP67
- Fixation : 4 thread-cutting M5 screws
- Colors: yellow, red, black, blue

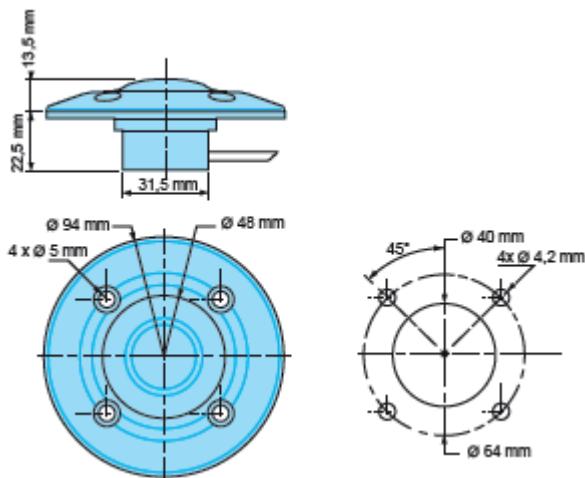

Electrical characteristics:

- Capacity of cut
- 24V, 48V, 110V, 220V AC = 10A
- 24V DC = 10A, 48V DC = 2A
- 110V DC = 0.4A, 220V DC = 0.2A
- Câble : 2 x 0.75mm²

Options :

- Other colors on request