


## Bicolor door indicator light

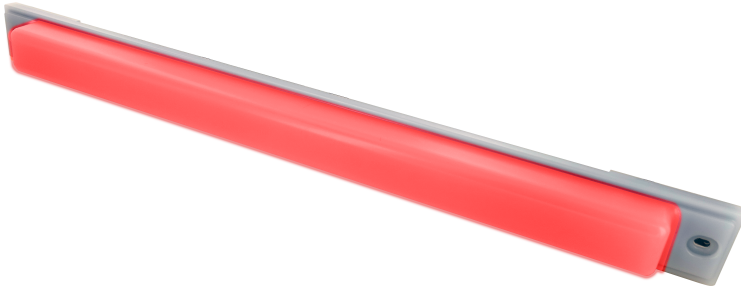

- **2 available lengths**
- **Easy integration**
- **Improved visibility of door status**
- **Improved life time, LED technology**

### Standards:

- Application EN 50155
- EMC EN 50121-3-2
- Shock/ vibrations EN 61373
- Environment EN 60068
- Fire/smoke EN 45545-2 / STM001
- REACH

### Mechanical / Environmental characteristics:

- Operating temperature: -25°C / +70°C
- Rear mounting
- IP54
- Plastic protective cover
- UV resistant
- IK06
- Cable or 6,35 Faston Connection

### Electrical characteristics:

- Power supply: 72 - 110Vdc (+25% / -30%)
- Power consumption =< 15 W
- Long service life >= 50 000 h
- Blinking through external control

### Optical characteristics:

- Color: red, green, amber or red/amber LEDs
- Luminance > 30cd/m<sup>2</sup>


### Options:

- Other voltages on request
- Luminance / color can be adapted on request

## Bicolor door indicator light

### Dimensions:

Length = 340 mm

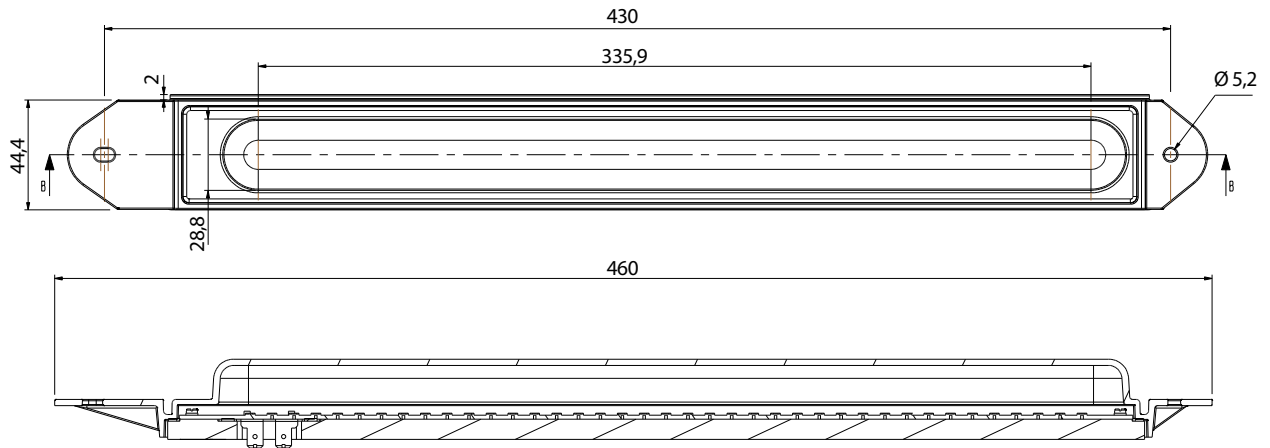

Length = 430 mm

