




# Indicator lights

## M-Door range

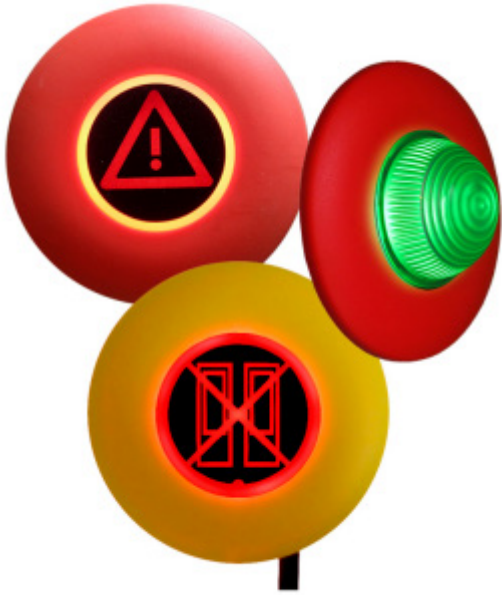

- > Hubcaps - Metal or plastic versions, choice of colors
- > Message indicator lights - Pictograms customizable
- > Multi-directional indicator lights - Verrine: two overflow heights
- > Double-sided indicators - Glass-mounted, double or double mixte indicator / button

### Characteristics:

- Vandal-resistant design
- Modularity of sightglass and bezel
- Operating temperature : -40°C / +85°C (depending on cable type)
- IP 65/67 sealing
- IK07 impact resistance
- Adaptability
- High brightness
- Long life (LED technology)

### Standards:

- Application EN 50155
- Environment EN 60068, EN 60529
- EMC EN 50121-3-2
- Conception EN 14572, STI PMR
- Fire/smoke EN 45545-2, NF F 16 101 / 102
- Cable EN 50306-4
- REACH, RoHS