




Connection BJT range

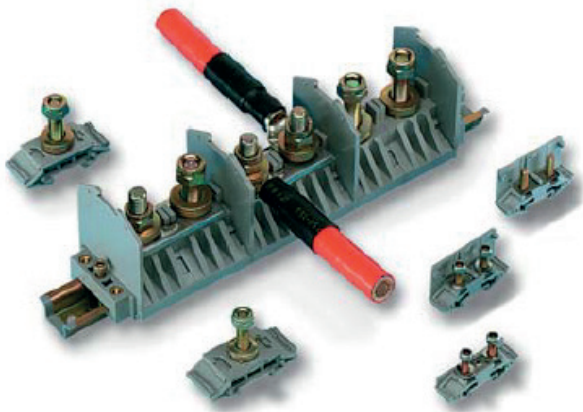

Stud connection terminals

→ 380V to 750V

→ 50A to 450 A

→ Cables from 6 to 200 mm²

Characteristics:

- Material: polycarbonate composed of 10% fiber glass
- Color: grey 733
- Fire resistance: UL94 : V0 class M2
- Maximum temperature use: -55°C to +110°C
- Equipment: self stoppin bolts and washers

References	BJT 9-5	BJT 12-5	BJT 14-6	BJT 23-8	BJT 32-12	BJT 40-14
Rated insulation voltage	380V AC-DC	750 V AC/DC	750V AC/DC	750V AC/DC	750V AC/DC	750V AC/DC
Standards	Class C acc. to CEI / NF EN 60664	Class C acc. to CEI / NF EN 337-1	Class C acc. to CEI / NF EN 337-1	Class C acc. to CEI / NF EN 337-1	Class C acc. to CEI / NF EN 337-1	Class C acc. to CEI / NF EN 337-1
Intensity	50A	71A	110A	200A	300A	450A
Nominal Ø(cable)	6mm ²	10mm ²	16mm ²	70mm ²	125mm ²	200mm ²
ØStud	4mm	5mm	6mm	8mm	14mm	14mm
Tightening torque	1,2Nm	2,5Nm	5Nm	13Nm	43Nm	58Nm



For further information (other references), please contact us.