

STOP REQUEST push button



- **360° actuation and lighting visibility**
- **Color blind lighting design**
- **Haptic feedback actuation (click effect)**
- **Slim profile**

Standards:

- EMC : ECER10, EN50121-3-2
- Fire/Smoke : ECER118, EN45545-2
- Environment : ISO16750, EN50155, EN60529, CEI62262, EN1373
- ROHS / REACH

Electrical characteristics:

- LED : 16/32V 20mA max
- Switch : 12V or 24V 50 mA max


Mechanical characteristics:

- Pole mounting : $\varnothing 35, \varnothing 34, \varnothing 32, \varnothing 30$ mm
- Panel mounting
- Protection IP40
- Actuation stroke : 1.5mm
- Mechanical service life : 4 000 000 operations
- Operating temperature : $-30^\circ / +70^\circ$

Options:

- 1 or 2 actuators
- Color, marking, relief and light customization

Single color schematic :

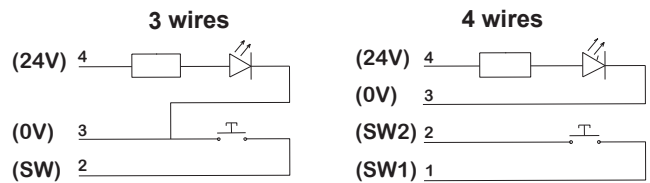

Dual color schematic :

