



ML 5-1 /170 LED Ø 170 mm combined Head, Marker and Tail lights

- **5 functions in 1 module**
- **Compliance with EN 15153-1: 2020**
- **Improved lifetime (full LED technology)**
- **Smart maintenance**
- **Optical adaptation to customer environment**

Standards:

- | | |
|--------------------|--|
| • Design | EN 15153 - 1: 2020
TSI LOC & PAS 2014 |
| • Application | EN 50155 |
| • EMC | EN 50121-3-2 |
| • Shock/vibrations | EN 61373 |
| • Environment | EN 60068, EN 60529 |
| • Fire/smoke | EN 45545 - 2 |
| • Cable | EN 50306 - 4 |
| • REACH | |

Mechanical / Environmental characteristics:

- Operating temperatures: - 40°C/+70°C
- Front or rear mounting
- IP66 front and IP65 rear
- Shock resistance: IK05
- Plastic protective cover
- Cable connection
- UV resistant

Electrical characteristics:

- Power supply: 24-36 or 72-110 Vdc (-30% / +25%)
- Optimized power consumption
- Long service life: 60 000h

Optical characteristics:

- Ø170 mm lit area

	EN15153-1:2020	Mafelec	
	Intensity (Cd)	Intensity (Cd)	Mean consumption (W) ±20%
Full Head light	40000-70000	≈ 60 000	≈ 28
Dimmed Head light	12000-16000	≈ 15 000	≈ 10
Full Marker light	300-700	≈ 600	≈ 8
Dimmed Marker light	100-300	≈ 200	≈ 4
Tail light	15-100	≈ 80	≈ 3




Options:

- Bearing angle adjustment at ±1.5° on the two axes after mounting
- Light status feedback (potential free contact)
- Customized connector and cable length
- Glass cover over plastic protective cover (for robustness against chemicals)
- Defrosting
- Optical characteristics adapted for products placed behind customer glass reducing luminous intensity by as much as 35%
- Mechanical interface mounting plate




ML 5-1 /170 LED Ø 170 mm combined Head, Marker and Tail lights

Dimensions:

Front mounting :

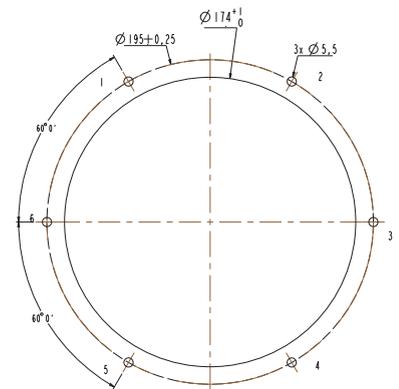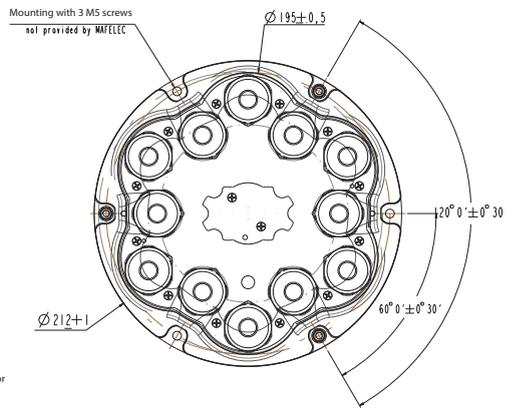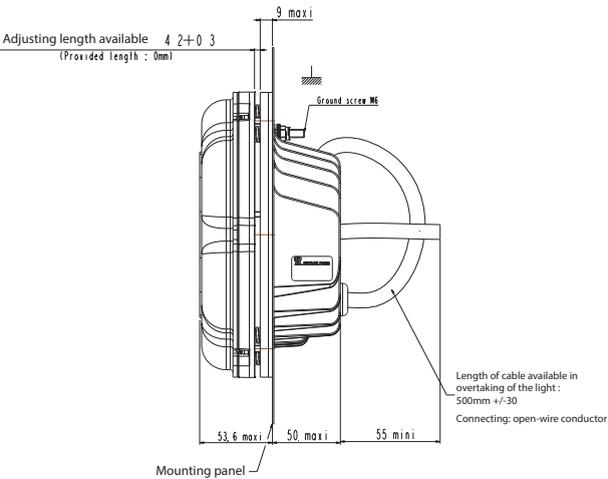

Rear mounting :

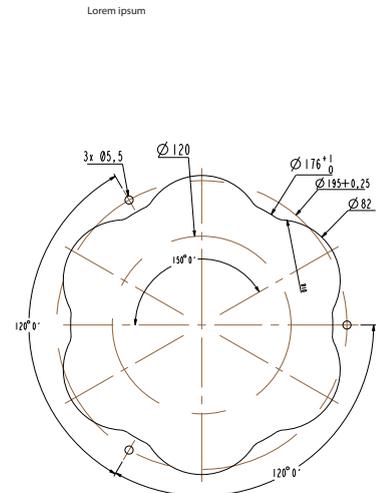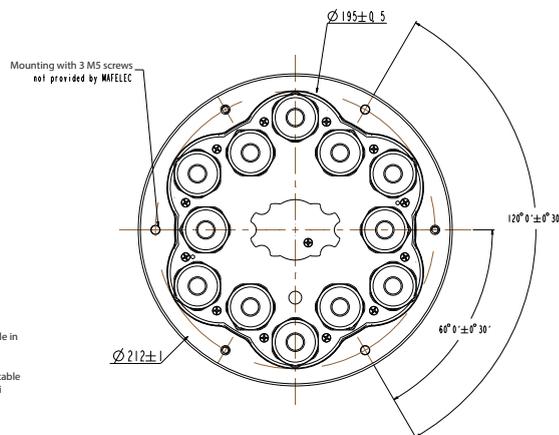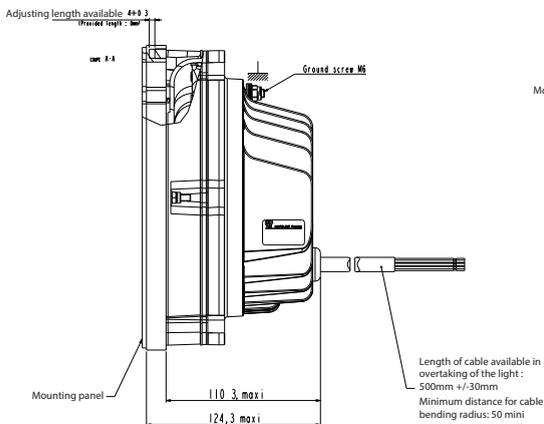

Lorem ipsum



AEROSPACE
& DEFENCE



COACHES
& BUSES



RAILWAY



INDUSTRY



ENERGY



PLEASURE
BOAT



VERTICAL
TRANSPORT



INDUSTRIAL
VEHICLES






OFFSHORE
& MINING

ML 5-1 /170 LED Ø 170 mm combined Head, Marker and Tail lights

Dimensions:

Front mounting with glass cover:

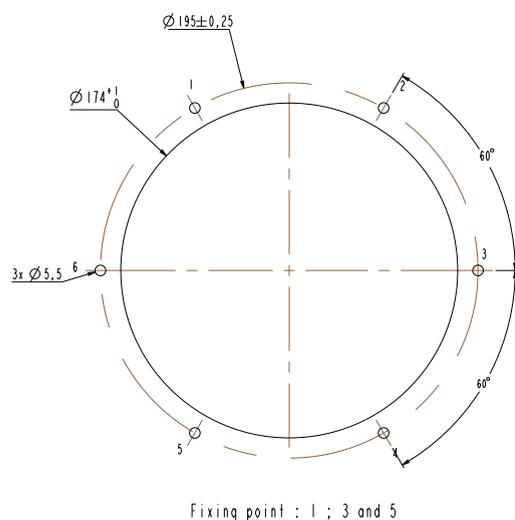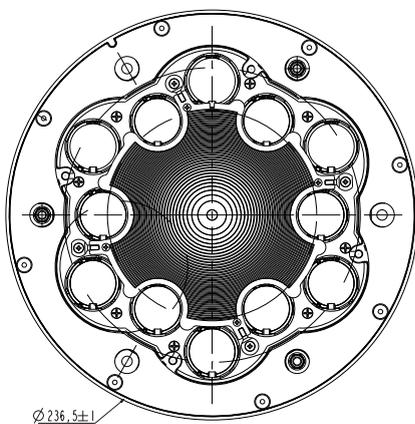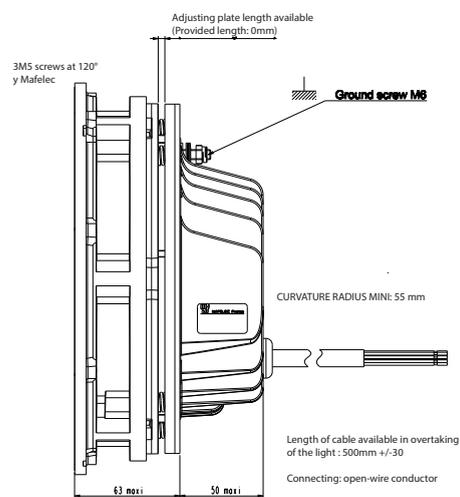

Rear mounting with glass cover:

